

PNEUMATIC DOUBLE SUPER HI-PRESSURE VISE


Model: ND-4"G, 5"G




- High-Force Cylinders hardly malfunction
- Fixed Height so several vises can be used together

STANDARD ACCESSORIES:


- 2 pcs of Alignment Wedge
- 4 pcs of Clamp
- 1 pc of Wrench

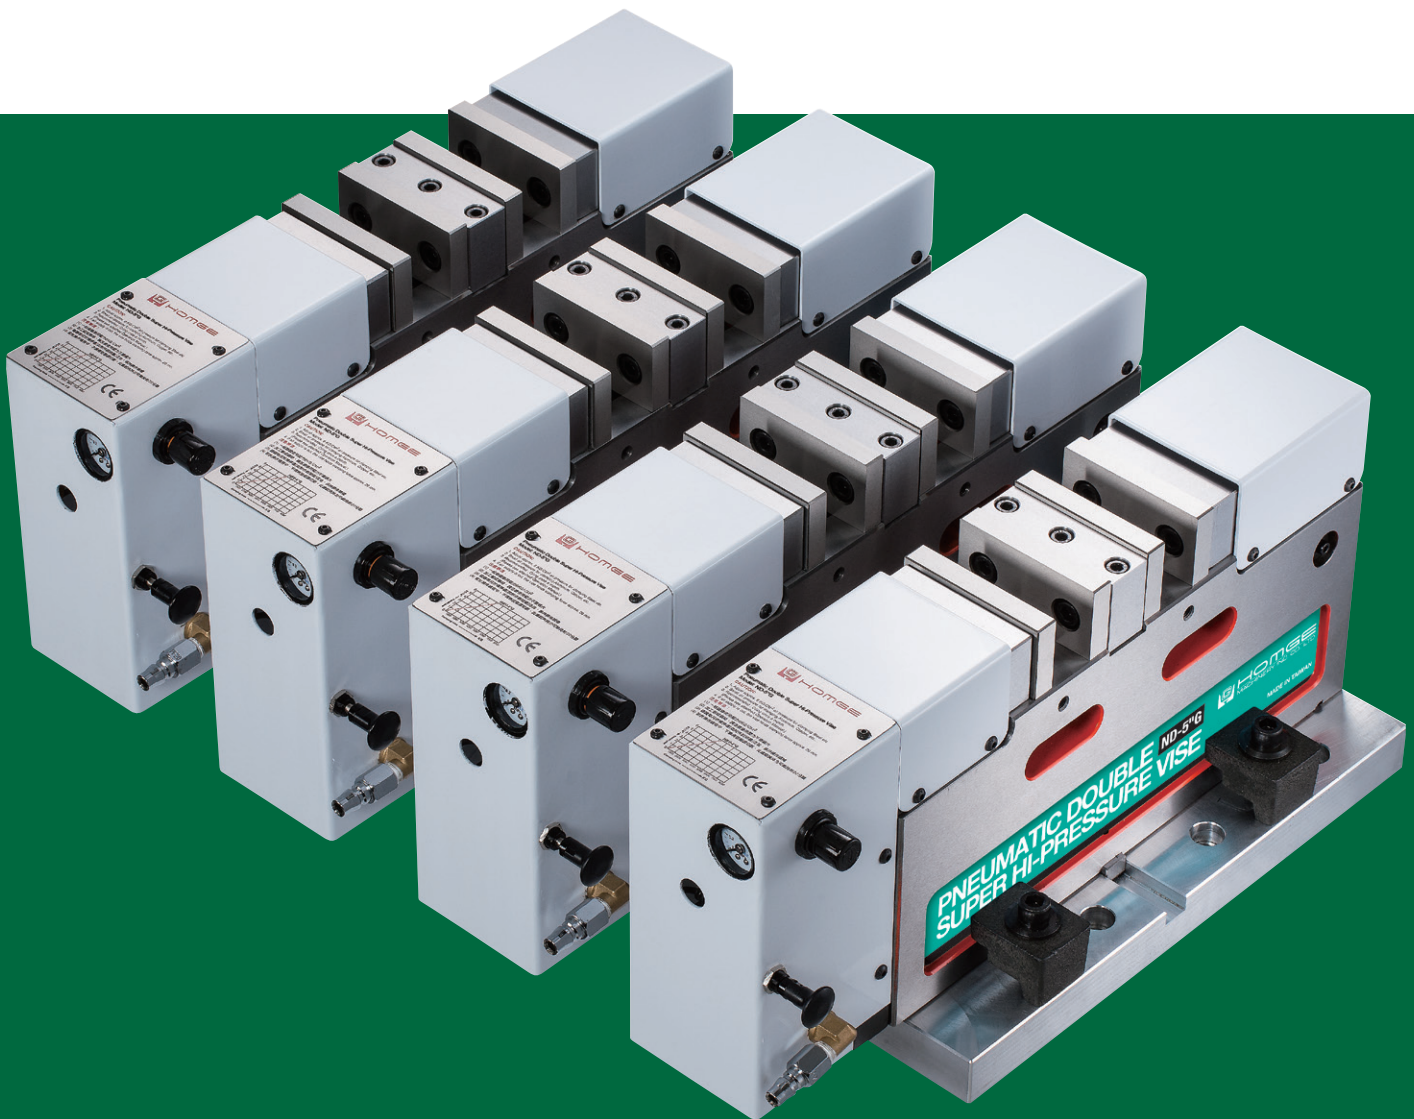

- The vise can hold 2 workpieces of different sizes. Allows an extra tolerance of up to 2 mm in workpieces.
- Special High-Force Cylinders are designed to enhance clamping force of 0-4000kg and can be adjusted depends on the material of work-piece.
- Vise body is made of Ductile Iron above FCD 60 grade for high precision and durability. Slide ways are HARDENED to HRC 50° to further increase durability and maintain positioning height over long use.
- Pressure Adjusting Knob: for quick operations.
- High-Force Cylinders hardly malfunction.
- Special safety device to ensure the vise holds clamping force 20 minutes if the air supply is cut.
- Safety range is 4 mm.

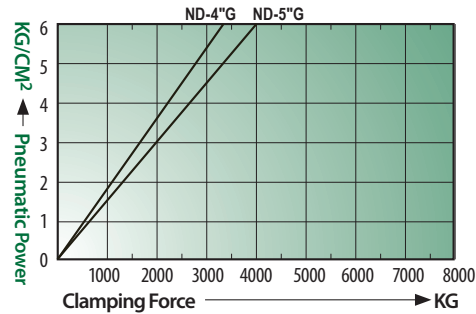
 Pneumatic power source 6kg/cm²


DIMENSIONS

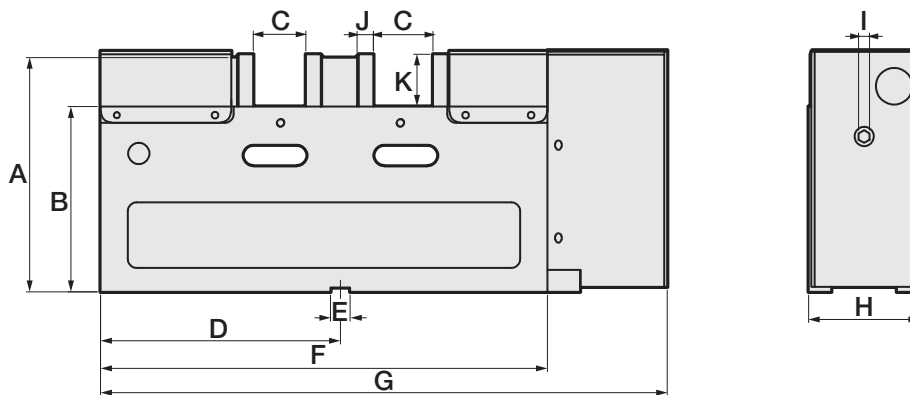

SPECIFICATIONS (Material: FCD 60 ductile Iron. Hardness: HRC50°)

Unit: mm

Model	A	B	C	D	E	F	G	H	I
ND-4"G	195	150±0.01	0-50	220±0.02	18	410	520	102	10
ND-5"G	202	150±0.01	0-115	280±0.02	18	530	630	130	10

Model	J	K	Max. Clamping Force	Safety Range	Weight (kg)
ND-4"G	15	48	0-3300 kg	4 mm	45
ND-5"G	15	55	0-4000 kg	4 mm	65