


PRECISION RAPID VISE (HYDRAULIC TYPE)


Model: HG-150h(A,B,C,D), 175h(B,C,D), 200h(A,B,C)

- Designed with HYDRAULIC LEAD SCREW for easy operation.
- This vise possesses all features of HG-Type.

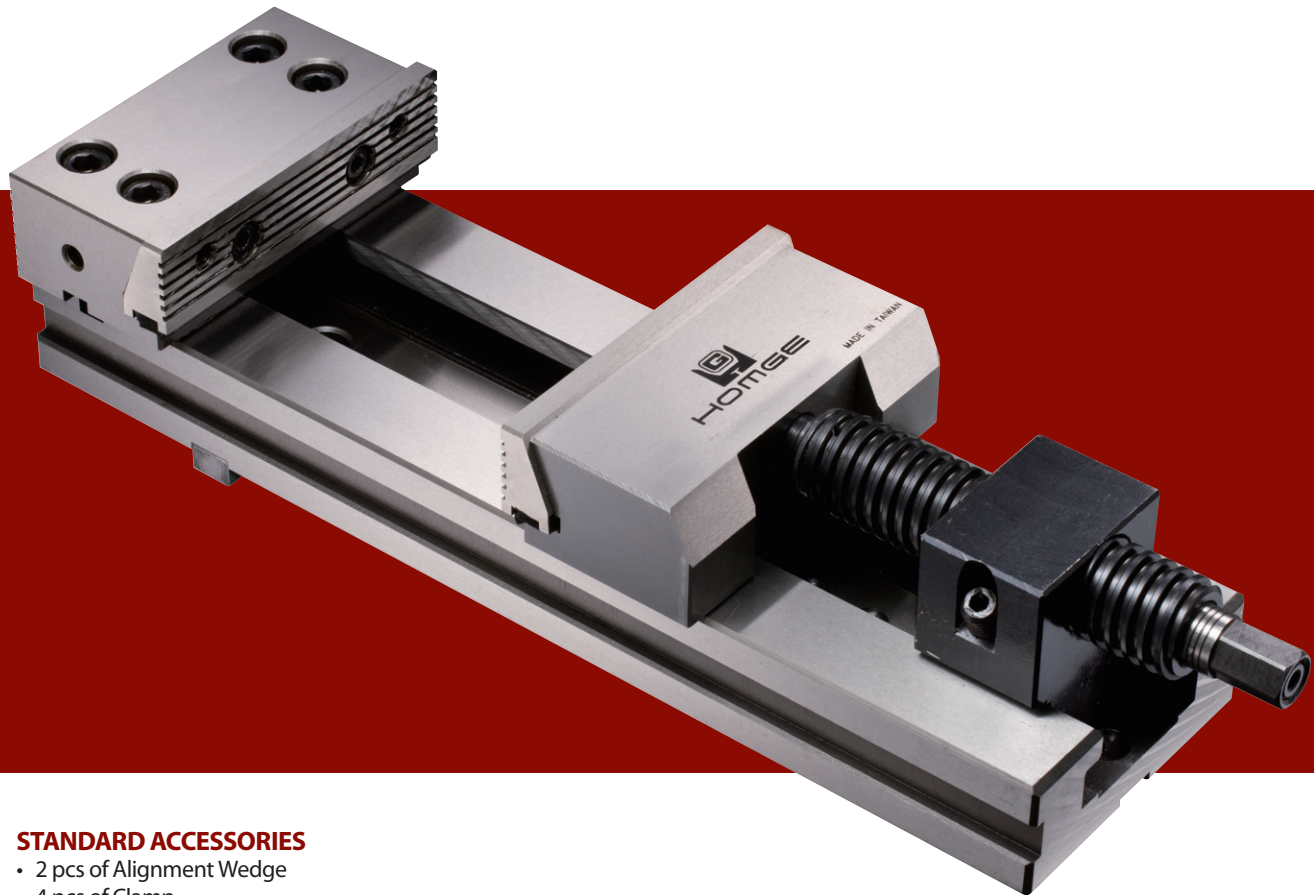

STANDARD ACCESSORIES

- 2 pcs of Alignment Wedge
- 4 pcs of Clamp
- 1 pc of Handle

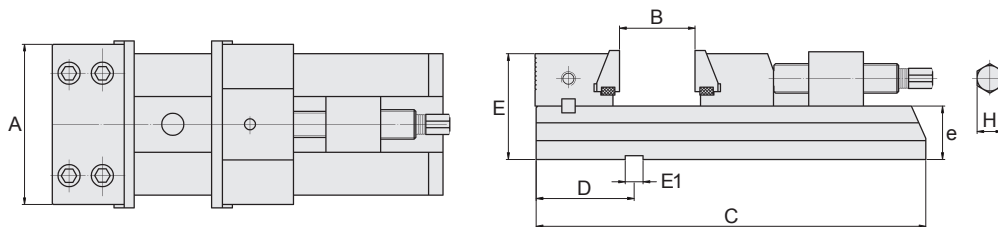

SPECIFICATIONS (Material: S50C. Hardness: HRC 52°~56°)

Unit: mm

MODEL	A	B	C	D	E	E1	e	H	Clamping force	Weight (kg)
HG-150hA	150	150	350	85±0.02	95	18	48±0.01	19	4000 kg	23.5
HG-150hB		200	400							25.5
HG-150hC		250	450							27.5
HG-150hD		300	500							29.5
HG-175hB	175	200	450	85±0.02	119	18	62±0.01	19	4000 kg	42.5
HG-175hC		250	500							46.5
HG-175hD		300	550							51.5
HG-200hA	205	200	470	85±0.02	126	18	63±0.01	19	4000 kg	55.5
HG-200hB		250	520							63.5
HG-200hC		300	570							73.5




PRECISION RAPID VISE
Model: HG-100,150(A,B,C,D),
HG-175(B,C,D), 200(A,B,C)

- Designed with an instant clamping Hex-Nut for quick adjustment when clamping different work-pieces with irregular lengths.
- Movable Jaw can be easily moved for clamping etc.
- Jaws are slotted for increased grip on workpiece.
- Movable Jaw is short in length for maximum opening capacity.
- Tapered Jaws provide more stable clamping.
- Made entirely of steel the Vise is strong and powerful and retains accuracy.
- Compact design allows maximum workholding capacity on machine.

STANDARD ACCESSORIES:


- 2 pcs of Alignment Wedge
- 4 pcs of Clamp

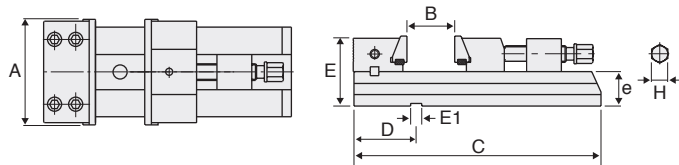

SPECIFICATIONS (Material: S50C. Hardness: HRC 52°~56°)

Unit: mm


Model	A	B	C	D	E	E1	e	H	Clamping force	Weight (kg)
HG-100	100	100	250	73 ± 0.02	68	14	37±0.01	14	1000kg	8
HG-150A	150	150	350	85 ± 0.02	95	18	48±0.01	19	2000kg	23
HG-150B		200	400							25
HG-150C		250	450							27
HG-150D		300	500							29
HG-175B	175	200	450	85 ± 0.02	119	18	62±0.01	19	2500kg	42
HG-175C		250	500							46
HG-175D		300	550							51
HG-200A	205	200	470	85 ± 0.02	126	18	63±0.01	19	2500kg	55
HG-200B		250	520							63
HG-200C		300	570							73

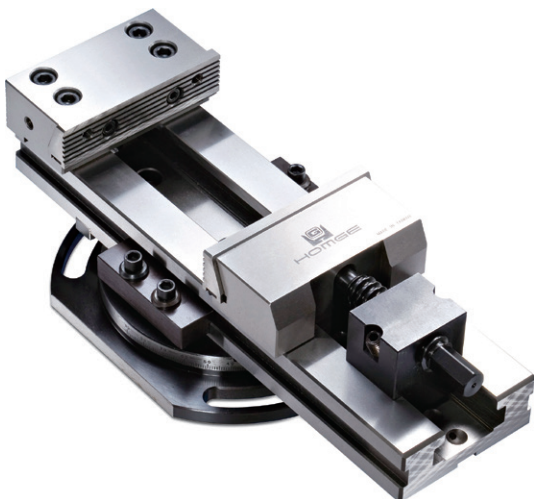

PRECISION RAPID VISE
with SWIVEL BASE
Model: HG-150S(A,B,C,D), 200S(A,B,C)

STANDARD ACCESSORIES:

- 2 pcs of Alignment Wedge
- 4 pcs of Clamp

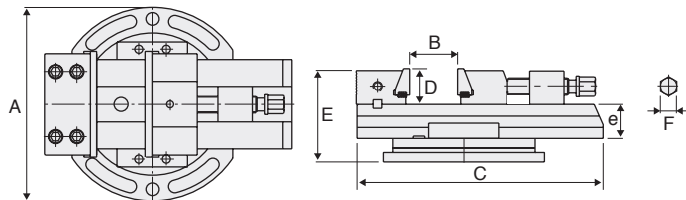

SPECIFICATIONS (Material: S50C. Hardness: HRC 52°~56°)

Unit: mm

Model	A	B	C	D	E	e	F	Clamping force	Weight (kg)
HG-150SA	275	150	350	50	128	48±0.01	19	2000kg	33
HG-150SB		200	400						35
HG-150SC		250	450						37
HG-150SD		300	500						39
HG-200SA	350	200	470	69	163	63±0.01	19	2500kg	65
HG-200SB		250	520						73
HG-200SC		300	570						83