


M/C DOUBLE SIDED TOOLING COLUMN

- Heat treated (Normalized)
- Application: Good for horizontal M/C

FEATURES:

Locked by MTP locating holes.

Using the assorted, rationalized jig component, you can quickly build up to meet requirement jig.

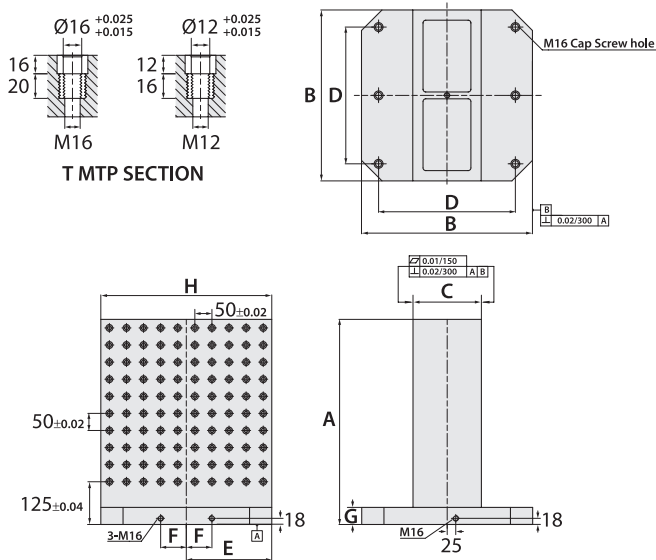

SPECIFICATIONS (Material: FCD 50 Ductile Iron / Aluminum A356)

Unit: mm

Model	A	B	C	D	E	F	G	H	T	No. of MTP Holes	Mounting Holes	Weight (kg)		
												FCD50	A356	
HDH-300300-0500-12	500	300	80	250	150	40	50	300	ø12	M12	96	4	110	—
HDH-400400-0500-12	500	400	150	320	200	55	50	400	ø12	M12	128	4	165	56
HDH-400400-0650-12	650	400	150	320	200	55	50	400	ø12	M12	176	4	210	86
HDH-500500-0600-12	600	500	200	400	250	75	50	500	ø12	M12	200	6	265	91
HDH-500500-0750-12	750	500	200	400	250	75	50	500	ø12	M12	260	6	335	135
HDH-630630-0700-12	700	630	250	500	315	100	50	630	ø12	M12	288	6	435	154
HDH-630630-0850-12	850	630	250	500	315	100	50	630	ø12	M12	360	6	516	202
HDH-800800-0800-12	800	800	300	640	400	135	50	800	ø12	M12	420	6	660	214
HDH-800800-1000-12	1000	800	300	640	400	135	50	800	ø12	M12	540	6	800	318
HDH-10001000-1000-12	1000	1000	350	800	500	165	55	1000	ø12	M12	684	6	1158	—
HDH-10001000-1250-12	1250	1000	350	800	500	165	55	1000	ø12	M12	874	6	1375	—
HDH-300300-0500-16	500	300	80	250	150	40	50	300	ø16	M16	96	4	105	—
HDH-400400-0500-16	500	400	150	320	200	55	50	400	ø16	M16	128	4	160	60
HDH-400400-0650-16	650	400	150	320	200	55	50	400	ø16	M16	176	4	205	86
HDH-500500-0600-16	600	500	200	400	250	75	50	500	ø16	M16	200	6	260	103
HDH-500500-0750-16	750	500	200	400	250	75	50	500	ø16	M16	260	6	330	135
HDH-630630-0700-16	700	630	250	500	315	100	50	630	ø16	M16	288	6	430	170
HDH-630630-0850-16	850	630	250	500	315	100	50	630	ø16	M16	360	6	505	202
HDH-800800-0800-16	800	800	300	640	400	135	50	800	ø16	M16	420	6	650	210
HDH-800800-1000-16	1000	800	300	640	400	135	50	800	ø16	M16	540	6	790	318
HDH-10001000-1000-16	1000	1000	350	800	500	165	55	1000	ø16	M16	684	6	1158	—
HDH-10001000-1250-16	1250	1000	350	800	500	165	55	1000	ø16	M16	874	6	1375	—