

3-Faced Pyramids

PYRAMID multiplies 5-axis throughput by aligning a tri-face carrier to the machine's rotary center. Three Zero-Point stations share that axis in perfect point symmetry, giving each workpiece an identical, mirrored coordinate frame while fitting comfortably inside the limited machine work-space.



Angled faces prevent part collision and keep cutting forces near the centerline. Loading three parts in one setup slashes idle time, and CAM can reuse a single toolpath with minor offsets. For seasoned 5-axis users chasing higher spindle uptime, PYRAMID turns precise alignment into measurable productivity.



3-Faced Pyramid


76

ZERO POINT QUICK CHANGE DEVICES / 3-FACED PYRAMIDS



M-52x52 (9314)

Size	Ø250x105 mm
Pull Studs	M-52x52PS / M-96x96PS
Mounting Holes	—
Weight (kg)	12.7
Standard with	Round Plate M-52x52 (8004) x 3 pcs

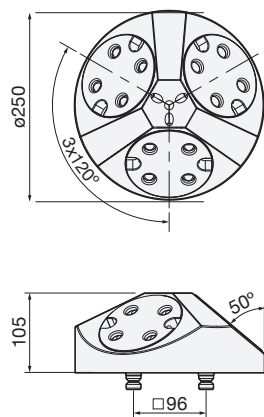

M-96x96 (9319)

Size	Ø400x150 mm
Pull Studs	M-96x96PS
Mounting Holes	—
Weight (kg)	44
Standard with	Round Plate M-96x96 (8053) x 3 pcs

